# HOT WATER ON DEMAND

### Enjoy fast hot water delivery to faucets and showers, saving time and reducing hot water waste

- INSTANT HOT WATER Get hot water where you want it and when you need it
- ACTIVATION FLEXIBILITY Choose the best activation method that meets your needs
- WATER CONSERVATION Reduce water waste by not waiting for hot water, saving up to 12,000 gallons of water per year\*

Plus, on-demand recirculation pumps can be used with any Rheem Tankless or Rheem Tank-Type water heater

### **DEMAND PUMP KIT – STANDARD**

The standard on-demand recirculation pump is an easy install solution and perfect for new construction, meeting on demand activation regulations for new homes.

**APPLICATIONS** – New construction

**INSTALL LOCATION** – Next to the water heater

**ACTIVATION** – Wired push button (included), motion sensor or remote transmitter

**PLUMBING REQUIREMENTS** – Requires a dedicated return line

**COMPATIBILITY** – Tank-type and tankless water heaters



### **KIT CONTAINS**

- 008-CT Taco Genie
- Wired push button
- Piping diagrams and instruction sheets for ease of installation

## **DEMAND PUMP KIT – UNDER SINK**

This under the sink option is a perfect solution for adding instant hot water to an existing water heater piping application.

APPLICATIONS - Retrofit and new construction

**INSTALL LOCATION** – Under sink cabinet of the fixture furthest from your water heater

**ACTIVATION** – Wired push button (included), motion sensor or remote transmitter

**PLUMBING REQUIREMENTS** – Uses existing cold water supply pipe as the return line – no dedicated return line required **COMPATIBILITY** – Tank-type and tankless water heaters

# KIT: AP185

### **KIT CONTAINS**

- 008-CT Taco Genie
- Wired push button
- Piping diagrams and instruction sheets for ease of installation
- + 2 Tee fittings
- + 2 Corrugated flex tubes

### **MAX. PIPE LENGTHS**

• 400 ft. total pipe length – 3/4" copper pipe • 100 ft. total pipe length – 1/2" copper pipe

avings per News Bulletin released by the United States bepartment of Energy / Oak Ridge National Laboratory, lovember 2002 study on water and energy savings in scilantial homes using bet water recirculating system




The new degree of comfort.™






# DEMAND PUMP KIT – STANDARD PIPING DIAGRAM



# **DEMAND PUMP KIT – UNDER SINK PIPING DIAGRAM**

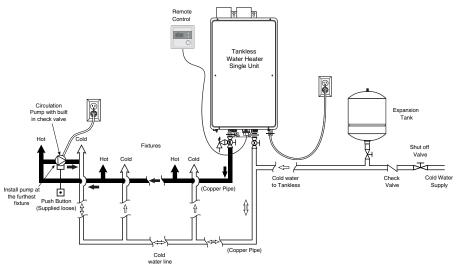



### WIRED PUSH BUTTON – Install the

BUTTON – Install the wired push button at the point of use for easy and convenient system activation. Part No: SP20863



### MOTION SENSOR

**KIT** – Install the motion sensor at the point of use so homeowners don't have to lift a finger to activate the system.

Part No: SP20862



### REMOTE TRANSMITTER KIT –

Utilize the remote transmitter kit to activate the system via a small remote button without being next to the point of use.

Part No: SP20861

### Pump kits and activation accessories can be ordered through Rheem Parts. For more information call 800-621-5622.

**ACTIVATION ACCESSORIES** 

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road Montgomery, Alabama 36117-4305 • www.rheem.com Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1 Brampton, Ontario L6Y 0P5 • www.rheem.com

